



Forsythe®

SINCE 1911 - FORSYTHE.ON.CA

BioLogik

MADE GREEN & CLEAN IN CANADA
SUCCESS IN SUSTAINABILITY

TECHNICAL DATA

BIOLOGIK AUTOMOTIVE SYNTHETIC GEAR OIL

Revolutionize Gear Performance with BioLogik Premium Biodegradable Synthetic Automotive Gear Oils

Experience the perfect synergy of advanced performance and environmental responsibility with Forsythe BioLogik Biodegradable Synthetic Automotive Gear Oils. Engineered for modern drivetrains, these cutting-edge gear oils deliver exceptional protection and performance while reducing ecological footprint.

Formulated with state-of-the-art synthetic base oils and environmentally friendly additives, BioLogik biodegradable gear oils offer unmatched wear resistance, oxidation stability, and thermal performance. They ensure smooth and reliable operation of gear systems, even under extreme loads, high temperatures, and challenging driving conditions.

Designed for forward-thinking automotive applications, these gear oils meet GL-5 and exceed the highest industry standards, delivering the same premium protection as traditional synthetics without compromising environmental integrity. Perfect for vehicles operating in sensitive environments, they biodegrade quickly, minimizing impact on soil and water in case of accidental spills or leaks.

Upgrade to Forsythe BioLogik Premium Biodegradable Synthetic Automotive Gear Oils to achieve superior gear protection, enhanced fuel efficiency, and a commitment to sustainability. Drive with confidence, knowing your gears—and the planet—are in the best hands.

FEATURES/BENNEFITS

Ultimately Biodegradable

- Biodegradable as per OECD 301B
- Formulated with a minimum of 80% renewable resources
- Biodegrades 60% within 28 days*
- Non-Toxic (Passes Acute Toxicity LC-50 Criteria)
- Biobased and sustainable

Superior Performance and Compatibility

- Exceptional hydrolytic and thermal stability
Excellent operation over a wide temperature range
- High viscosity index
- Extended Drain intervals
Exceptional oxidation stability

COMPATABILITY

- Fully compatible with hydrocarbon and PAO based gear oils
- Compatible with a large range of seals (NBR, HNBR, AU, FPM, etc.)



For more information | 1-800-363-2759 | gforsythe@forsythe.on.ca

All technical information, recommendations and statements contained herein are based on tests we believe to be reliable. It is offered in good faith but without guarantee. We make no warranty expressed or implied as to the suitability of our product for any particular use in operations not under our direct control. Liability is limited to the net purchase price of the product.





Forsythe®

SINCE 1911 - FORSYTHE.ON.CA


BioLogik

MADE GREEN & CLEAN IN CANADA
SUCCESS IN SUSTAINABILITY

TECHNICAL DATA

TYPICAL SPECIFICATIONS

PERFORMANCE DATA	ASTM		
SAE Grade		75W90	80W90
API Classification		GL-5	GL-5
AGMA Grade		4EP	4EP
Viscosity, cSt @ 40°C	D-445	90	112
Viscosity, cSt @ 100°C	D-445	15.5	17.9
Viscosity Index	D-2270	183	177
Specific Gravity	(g/ml @ 15.6°C)	0.92	0.93
Pour Point °C	D-97	-43	-38
Flash Point °C	D-92	>210	>220
Colour	Visual	Light Yellow	Light Yellow

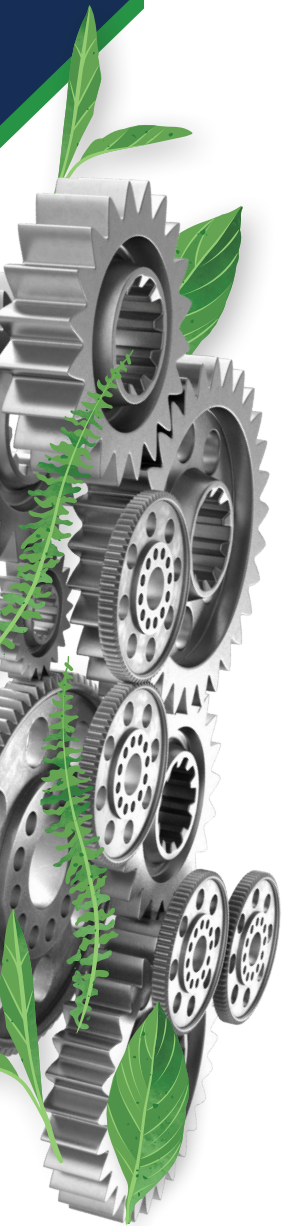

For more information | 1-800-363-2759 | gforsythe@forsythe.on.ca

All technical information, recommendations and statements contained herein are based on tests we believe to be reliable. It is offered in good faith but without guarantee. We make no warranty expressed or implied as to the suitability of our product for any particular use in operations not under our direct control. Liability is limited to the net purchase price of the product.



Since 1911

